

engineered with you in mind

Part No.: R001536R

Description:

This document establishes the specifications siamese type cable containing one RG6/U and two conductors unshielded used in communication applications.

Construction Details (18/2):

Conductor: 18AWG Stranded Bare Copper
Insulation Material: Polyolefin.
Color Code: Black, Red

Construction Details (RG6/U):

Conductor: 18AWG Solid Bare Copper
Dielectric Material: Cellular Polyethylene.
Nominal Dielectric Core O.D.: 0.180 in.
Braid Shield: CCA

Construction Details (Overall):

Construction Type: Siamese
Jacket Material: Polyvinyl Chloride
Nominal Cable Dimensions: Minor: 0.270 in. (RG6/U)
Minor: 0.198 in. (18/2)
Major: 0.493 in.
Jacket Color: Black or Per Customer Requirement

Electricals (RG6/U):

Nominal Characteristic Impedance: 75 Ω
Nominal Capacitance: 17.3 pF/ft
Nominal Velocity of Propagation: 78%
Nominal Attenuation per 100 ft:

- 2.20 dB @ 100 MHz
- 4.00 dB @ 200 MHz
- 8.30 dB @ 900 MHz

Issue Date: 03/11
Revision: 0


All warranty information can be viewed at WWW.REMEE.COM.

This product is RoHS compliant to directive 2002/95/EC .

PO Box 488 468 RT17A Florida, NY 10921
Customer Service: 800-431-3864 Fax: 845-651-4160 Website: www.remee.com

It is the sole responsibility of the user to have the most current specification. Specifications are subject to change without notice.

Composite Video with Power Pair

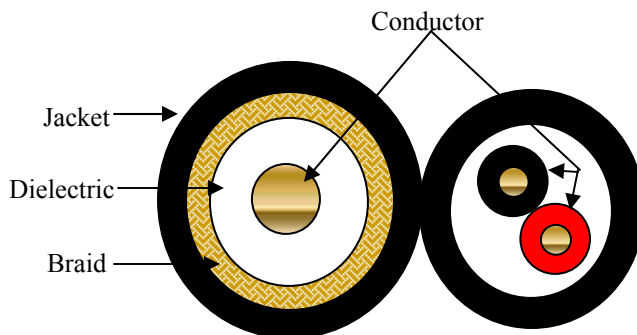

Standards

- NEC Articles 800
- UL Subject 444

Codes & Listings

- CM Rating
- C(ETL)US CM

Technical Details:

Temperature Rating	Operation: -10°C to +60°C
Nominal Weight:	66 lbs. / 1,000 ft

Preparation for Shipment:

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.

