

ETL listed for guaranteed performance
Made in the USA

Part No.: R001564W

Applications


This document establishes the specifications for a RG 6/U Type 75 ohm coaxial cable used for video display, point-of-sale terminals, Local Area Network controls, and CATV broadcast applications swept to 3.0 GHz

Construction Details

Center conductor: 18AWG Solid copperweld
Dielectric: Cellular Polyethylene.
Dielectric core O.D: 0.170 in., nominal.
1st shield: Coaxial Shielding Tape Bonded to Core
2nd shield: Aluminum braid.
3rd shield: coaxial shielding tape
4th shield: Aluminum braid
Jacket material: Polyvinyl Chloride.
Jacket Color: Per Customer Requirement
Surface Print: 3122598 RG6/U QUAD TYPE CM 18AWG
C(ETL)US OR CATV SWEPT TO 3.0 GHZ +
Sequential Footage Marking

Electricals

Capacitance: 16.2 pF/ft, nominal
Characteristic impedance: 75 ohms, nominal
Velocity of propagation: 84% nominal
Nominal attenuation dB per 100 feet:
1.46 dB @ 50 MHz
2.05 dB @ 100 MHz
2.83 dB @ 200 MHz
6.88 dB @ 1000 MHz
7.50 dB @ 1200 MHz
8.50 dB @ 1800 MHz
9.50 dB @ 2200 MHz
12.0 dB @ 3000 MHz

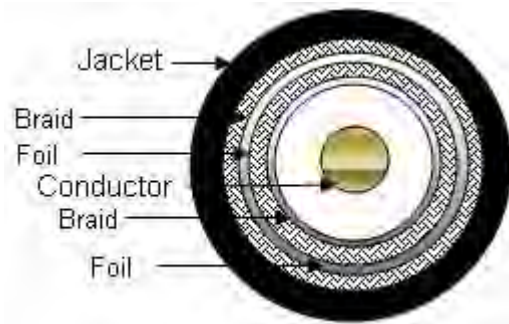

Technical Details

Temperature Rating	
Operation	-20°C to 60°C
Nominal Diameter	0.282 in.

Standards

- NEC Articles 800, 820
- UL Subject 444 & 1581

Codes & Listings

- C(ETL)US CM
- Type CM CATV

Preparation For Shipment

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.



MADE IN THE USA



Issue Date: 07/11
Revision: 1

All warranty information can be viewed at WWW.REMEE.COM.

This product is RoHS compliant to directive 2002/95/EC .

PO Box 488 468 RT17A Florida, NY 10921
Customer Service: 800-431-3864 Fax: 845-651-4160 Website: www.remee.com

It is the sole responsibility of the user to have the most current specification. Specifications are subject to change without notice.