

1.0 SCOPE

This document establishes the specification requirements for a multimode OM1 distribution fiberoptic cable. This cable construction consists of multimode fibers in a distribution tight-buffered design with a riser rated PVC jacket suitable for indoors.


2.0 APPLICABLE DOCUMENTS

Reference Documents: TIA/EIA FOTP Standards 455
Color Coding of Fiber Optic Cables TIA/EIA-598
UL 1666
GR-409-CORE

3.0 REQUIREMENTS

This document contains test values for all-important mechanical, optical, and environmental parameters and as such, is the basis for all-incoming inspection and acceptance.

4.0 CABLE CROSS SECTION

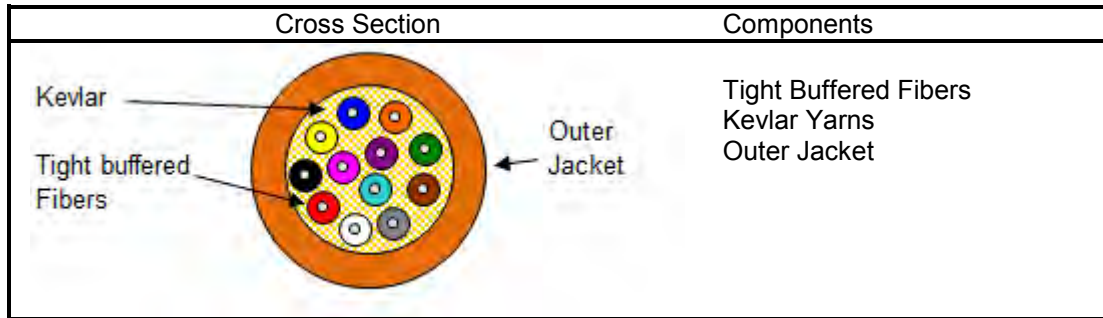

5.0 OVERALL CABLE CONSTRUCTION

5.1 Tight Buffered Fiber

Dimension: 900µm, nominal.

Tight buffered fiber color code: 1-blue, 2-orange, 3-green, 4-brown, 5-slate, 6-white, 7-red, 8-black, 9-yellow, 10-violet, 11-rose, and 12-aqua.

5.2 Cable strength

Aramid yarns are pulled in with the tight-buffered fibers under the outer jacket.

5.3 Outer Sheath

Orange riser rated PVC jacket (or color per customer request)

5.4 Cable Markings

REMFO 11 SERIES, FIBER OPTIC CABLE, XX (No. of fibers)-62.5/125, REMEE PRODUCTS CORP., MM/YY (month & year of manufacture), OFNR C(ETL)US, Sequentially meter marked.
Special print as required by customer.

5.5 Nominal Cable Dimensions & Weights

Remeer Products Part Number	No. of Fibers	Cable OD (mm)	Cable OD (in.)	Weight KG/KM	Weight LB/1000ft
11-002-22J-AZNONF	2	4.3	.170	16	11
11-004-22J-AZNONF	4	4.7	.185	19	13
11-006-22J-AZNONF	6	5.1	.200	24	16
11-008-22J-AZNONF	8	5.3	.210	27	18
11-012-22J-AZNONF	12	6.4	.250	34	23

6.0 FIBER CHARACTERISTICS

6.1 Physical Parameters (nominal)

Fiber Type	Multimode Graded Index
Maximum Attenuation @ 850/1300nm	3.2 /1.0 dB/km
Minimum Bandwidth @850/1300nm	200/600MHz-km
Core Diameter, nominal	62.5 ± 3 µm
Cladding Diameter	125.0 ± 1.0 µm
Primary Coating Diameter	245 ± 10 µm
Cladding Non-circularity	<2%
Core/Clad Offset	3 µm
Zero Dispersion Wavelength	1320-1365nm
Numerical Aperture	0.275 ± .015
Group Refractive Index @ 850/1300nm	1.496/1.491
Proof Test	100 kpsi

*Guaranteed Gigabit Ethernet Distance of 300/550mtr per IEEE802.3z.

*Measured attenuations on shipping reels will not exceed the nominal values by .75dB/km.

7.0 MECHANICAL & ENVIRONMENTAL PERFORMANCE

Maximum Tensile Load for:

Installation: 2&4-fiber 1405N/315lbf, 6&8-fiber 1610N/362lbf
12-fiber 2700N/600lbf

Long Term: 2&4-fiber 455N/102lbf, 6&8-fiber 535N/120lbf
12-fiber 600N/135lbf

Minimum bending radius:

Loaded: 20 x diameter
Unloaded: 10 x diameter

Impact Resistance: 25 Impacts (min.)

Flexing, ±90°: 25 Cycles (min.)

Temperature rating:

Operation, -40°C to +85°C

Installation, 0°C to +75°C

Storage, -55°C to +85°C

Crush Resistance: 100N/cm

8.0 PREPARATION FOR DELIVERY

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available.



1751 State Rte 17A Florida, New York 10921
800 431-3864