

1.0 SCOPE

This document establishes the specification requirements for a distribution singlemode OS2, fiberoptic cable. This cable construction consists of singlemode fibers in a distribution tight-buffered design with a plenum rated jacket.


2.0 APPLICABLE DOCUMENTS

Reference Documents: TIA/EIA FOTP Standards 455
Color Coding of Fiber Optic Cables TIA/EIA-598
UL 910
GR-409-CORE

3.0 REQUIREMENTS

This document contains test values for all-important mechanical, optical, and environmental parameters and as such, is the basis for all-incoming inspection and acceptance.

4.0 CABLE CROSS SECTION *(Representation of a standard 48 fiber construction)*

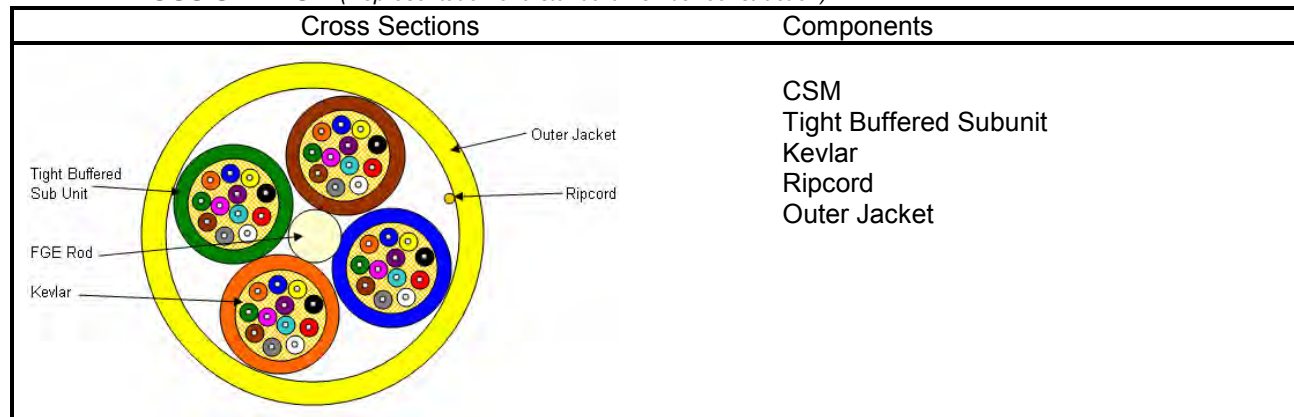

5.0 OVERALL CABLE CONSTRUCTION

5.1 Tight Buffered Fiber

Dimension: 900µm, nominal.

Tight buffered fiber color code: 1-blue, 2-orange, 3-green, 4-brown, 5-slate, 6-white, 7-red, 8-black, 9-yellow, 10-violet, 11-rose, and 12-aqua.

5.2 Sub-unit consists of aramid yarns that are pulled in with the tight-buffered fibers under a sub-unit jacket that is uniquely identified.

5.3 Cable strength Member

Fiberglass Epoxy Rod (dielectric)

An up coat of plenum material (if necessary per construction for symmetry).

5.4 Cable Core

Sub-units and fillers (if needed) are stranded around the CSM, using reverse oscillation.

A non-wicking and non-hygroscopic tape is applied longitudinally with a nominal 25% overlap.

Binder yarns are applied over the core tape.

5.5 Outer Sheath

Yellow plenum rated Remguard® jacket (or color per customer request)

5.6 Cable Markings

REMFO 33 SERIES, FIBER OPTIC CABLE, XX (denotes number of fibers)-SM, REMEE PRODUCTS CORP., MM/YY (month & year of manufacture), OFNP C(ETL)US, Sequentially marked.

Special print as required by customer.

5.7 Nominal Cable Dimensions & Weights

Remeo Products Part Number	No. of Fibers	Cable OD (mm)	Cable OD (in.)	Weight KG/KM	Weight LB/1000ft
33-018-76E-RYSFNP	18	13.9	0.546	173	116
33-024-76E-RYSFNP	24	13.9	0.546	170	114
33-036-76E-RYSFNP	36	16.7	0.656	253	170
33-048-76E-RYSLNP	48	16.1	0.634	225	151
33-060-76E-RYSLNP	60	17.7	0.696	275	185
33-072-76E-RYSLNP	72	19.2	0.756	334	224
33-096-76E-RYSLNP	96	23.5	0.926	520	349

6.0 FIBER CHARACTERISTICS

6.1 Physical Parameters (nominal)

Fiber Type	Single mode*
Maximum Attenuation @ 1310/1550nm**	0.40/0.30 dB/km
Cladding Diameter	125.0 ± 0.7 µm
Maximum Core/Clad Concentricity Error	0.5 µm
Maximum Cladding Non-circularity	0.7%
Primary Coating Diameter	245 ± 7 µm
Cabled Cutoff Wavelength	<1260nm
Mode Field Diameter	9.0 ± 0.4µm @1310nm 10.1 ± 0.5µm @1550nm
Temperature Dependence	≤0.05dB/km (-60°C to 85°C)
Zero Dispersion Slope	0.090ps/nm ² -km
Maximum PMD Link Design Value	0.06ps/√km
Group Refractive Index @ 1310/1550	1.467 / 1.468
Proof Test	100 kpsi

*According to ITU G.652.d

**Measured attenuations on shipping reels will not exceed the nominal values by .75dB/km.

7.0 MECHANICAL & ENVIRONMENTAL PERFORMANCE

Maximum Tensile Load for:

Installation: 2700N / 607lbf

Long Term: 890N / 200lbf

Minimum bending radius:

Loaded: 20 x diameter

Unloaded: 10 x diameter

Crush Resistance: 220N/cm

Impact Resistance: 25 Impacts (min.)

Flexing, ±90°: 25 Cycles (min.)

Temperature Rating:

Operation, -20°C to +85°C

Installation, 0°C to +75°C

Storage, -40°C to +85°C

8.0 PREPARATION FOR DELIVERY

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available.



1751 State Rte 17A Florida, NY 10921
800 431-3864