

Part No.: 760185

Applications:

This document establishes the specifications of a plenum rated four conductor shielded cable used for fire protective signaling circuit applications.

Construction Details:

Number of Conductors: 4/C
 Conductor: 18AWG Solid Bare Copper
 Insulation Material: Remguard Plenum Polymer
 Nominal Insulation Thickness: 0.010 in.
 Nominal Insulation Diameter: 0.060 in.
 Color Code: Red, Black, Green, White
 Shield: Aluminum/Polyester Tape (100% coverage)
 Drain: Tinned Copper
 Jacket Material: Remguard Plenum Polymer
 Jacket Color: Red or Per Customer Requirement
 Nominal Jacket Thickness: 0.015 in.
 Nominal Diameter: 0.178 in.
 Surface Print: 3122598 FPLP 18AWG SHIELDED
 (ETL)US + Sequential Footage
 Marking

Electricals:


Suggested Working Voltage: 300 Volts, rms.

Technical Details:

Temperature Rating

Operation: -2°C to +60°C

Nominal Weight: 32 lbs. / 1,000 Feet

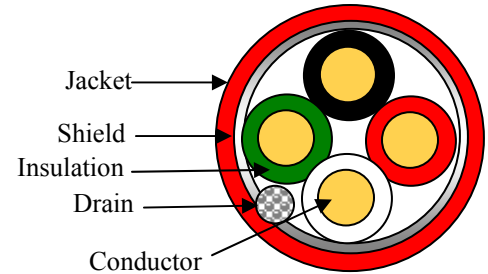

Standards:

- NEC Article 760
- UL Subject 1424, Type FPLP

Codes & Listings:

- (ETL)US

Preparation for Shipment:

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.



MADE IN THE USA



Issue Date: 03/11
Revision: 0

All warranty information can be viewed at WWW.REMEE.COM.

This product is RoHS compliant to directive 2002/95/EC .

PO Box 488 468 RT17A Florida, NY 10921
 Customer Service: 800-431-3864 Fax: 845-651-4160 Website: www.remee.com

It is the sole responsibility of the user to have the most current specification. Specifications are subject to change without notice.