


Part No.: NY164CUH

Applications:

This document establishes the specifications for a four conductor unshielded cable used for Local Law #5/73 fire alarm installations.

Construction Details:

Number of Conductors: 4/C
 Conductor: 16AWG Solid Bare Copper.
 Insulation Material: ECTFE.
 Nominal Insulation Thickness: 0.016"
 Nominal Insulation Diameter: 0.082"
 Color Code: Black, Red, Green, White
 Shield: N/A
 Drain: N/A
 Jacket Material: ECTFE.
 Jacket Color: Red
 Nominal Jacket Thickness: 0.026"
 Nominal Diameter: 0.251"
 Surface Print: REMEE PRODUCTS CORP. TYPE
 FPLP 16AWG 150°C (ETL)US
 ALSO CLASSIFIED NYC CERT.
 FIRE ALARM CABLE +
 Sequential Footage Marking

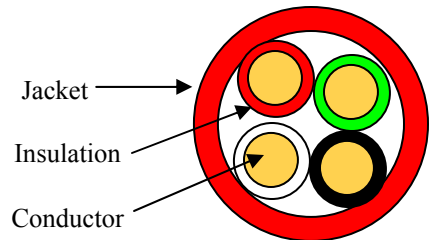

Standards:

- National Electric Code—Article 760 Type FPLP
- Building Code City of New York
- Certified For Use In New York City
- Complies With City of New York Technical Policy & Procedure Notice #2/95

Codes & Listings:

- (ETL)US FPLP

Preparation for Shipment:

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.

Electricals:

Suggested Working Voltage: 300 Volts, rms.

Technical Details:

Temperature Rating	Operation	-20°C to 150°C
Nominal Weight:	59 lbs. / 1,000 ft.	



MADE IN THE USA



Issue Date: 11/10
Revision: 0

All warranty information can be viewed at WWW.REMEE.COM.

This product is RoHS compliant to directive 2002/95/EC .

PO Box 488 468 RT17A Florida, NY 10921
 Customer Service: 800-431-3864 Fax: 845-651-4160 Website: www.remee.com

It is the sole responsibility of the user to have the most current specification. Specifications are subject to change without notice.