

14-4 Unshielded Audio Cable Non-Plenum

ETL listed for guaranteed performance
Made in the USA

Part No.: CH1024F

Applications:

This document establishes the specifications for a four conductor cable used in audio and power limited circuit applications.

Construction Details:

Number of Conductors: 4/C
 Conductor: 14 AWG 105/34 Bare Copper
 Insulation Material: Polyvinyl Chloride
 Nominal Insulation Thickness: 0.012 in.
 Nominal Insulation Diameter: 0.097 in.
 Color Code: Black, Red, White, Green
 Jacket Material: Polyvinyl Chloride
 Nominal Jacket Thickness: .0018 in.
 Nominal Diameter: 0.270 in.
 Surface Print: 3122598 HI-STRAND AUDIO
 CABLE CSA C(ETL) FT4 4 COND
 14AWG 105 STRAND 75°C CL3R
 (ETL)US MADE IN USA...
 SUITABLE FOR OUTDOOR
 USE...OXYGEN FREE COPPER
 + Sequential Footage Marking

Electricals:


Suggested Working Voltage: 150 Volts, rms.

Technical Details:

Temperature Rating

Operation: -20°C to +75°C

Nominal Weight: 71 lbs. / 1,000 Feet

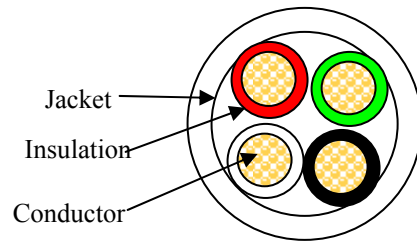

Standards:

- NEC Article 725
- UL Subject 13, Type CL3R, FT4

Codes & Listings:

- (ETL)US
- C(ETL)

Preparation for Shipment:

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.



Issue Date: 02/11
Revision: 4

All warranty information can be viewed at WWW.REMEE.COM.

This product is RoHS compliant to directive 2002/95/EC .

PO Box 488 468 RT17A Florida, NY 10921
 Customer Service: 800-431-3864 Fax: 845-651-4160 Website: www.remee.com

It is the sole responsibility of the user to have the most current specification. Specifications are subject to change without notice.